

PROJECT: MECA CHI HEALTH CENTRE TYPE: CAT. #: D1 - SO - 3500K - T22-48 - 277 - DIM - TWH - SC

PROFILE

OUTPUT	STANDARD OUTPUT (150 W)
DISTRIBUTION	ASYMMETRIC INDIRECT
CCT	2700K, 3000K, 3500K, 4000K
CRI	80 CRI
PERFORMANCE	UP TO 16,704 DELIVERED LUMENS
VOLTAGE	120V OR 277V
POWER	INTEGRATED POWER SUPPLY
CONTROL	0-10V (DIMS DOWN TO 10%)
WEIGHT	25.0 LBS (11.3 KG)
HOUSING	EXTRUDED ALUMINUM HOUSING
LENS	TEMPERED GLASS
FINISH	HIGH DURABILITY POWDER COATING
WARRANTY	5-YEAR LIMITED
OPERATING TEMP	-40° C TO 50° C
LUMEN MAINTENANCE	84,000 HOURS
CERTIFICATION	ETL AND cETL FOR DRY LOCATION, IP66 OPTION



FIXTURE SHOWN:
D1-SO-35K-SM-X-DIM-TWH

FINISHES




DISTRIBUTION



PERFORMANCE SUMMARY

4000K	LUMENS	EFFICACY
150 W	16,704 LM	108.0 LM/W

DIMENSIONS

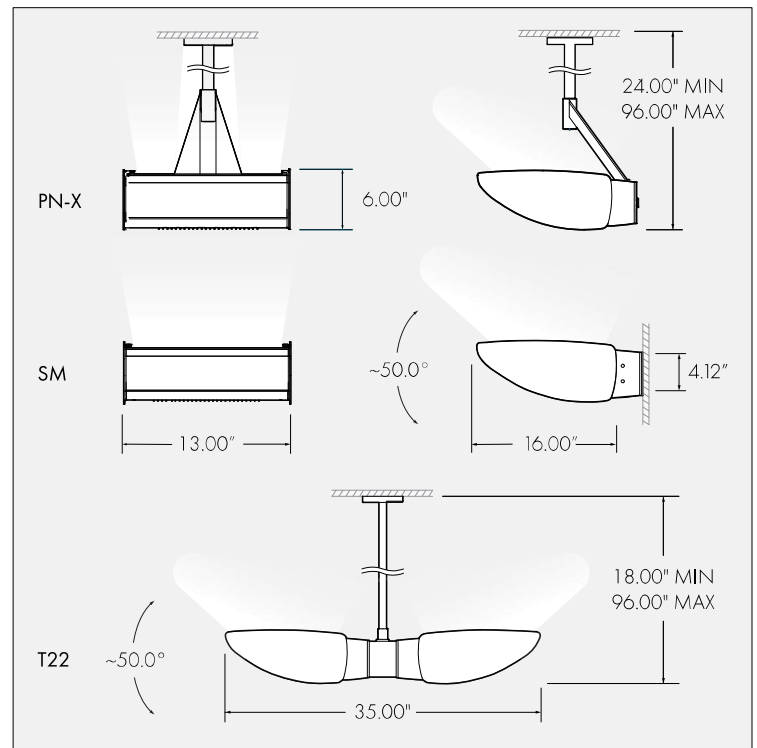

SPECIFICATION							
D1	SO						Separate options with dashes
1	2	3	4	5	6	7	8
1 FIXTURE		4 MOUNTING		6 CONTROL OPTIONS		8 OPTIONS	
D1 INTERIOR D1		SURFACE/WALL SM		NON DIMMING NON		SWIVEL CANOPY SC	
For exterior use see IP66 option		PENDANT, SINGLE FIXTURE ¹ PN-X		0-10V DIMMING DIM		For use with PN and T22 mounting options	
For use in natatorium applications use CRF and IP66 options		X = specify pendant length (24" min, 96" max)		Dims to 10%. Contact factory for 1% dimming.		COLUMN MOUNT CM-X	
		See options for Swivel Canopy		Dimming controls to be supplied by others.		Contact factory for column mount details	
		Ceiling canopies are painted semi-gloss white				IP66 RATING IP66	
2 WATTAGE		PENDANT, TWIN FIXTURE T22-X		7 FIXTURE FINISH		For exterior use	
STANDARD OUTPUT SO		X = specify pendant length (18" min, 96" max)		TEXTURED WHITE TWH		Not available with 500W	
150W		See options for Swivel Canopy		TEXTURED BLACK TBL		CORROSION RESISTANT	
See D2 for higher wattages		Ceiling canopies are painted semi-gloss white		TEXTURED BRONZE TBR		FINISH CRF	
				TEXTURED LIGHT BRONZE TLB		CRF is recommended for natatorium applications,	
3 CCT		5 VOLTAGE		TEXTURED GRAY TGR		coastal, and extreme exterior environments	
2700K 2700K		120V 120		TEXTURED NATURAL TNA			
3000K 3000K		277V 277		TEXTURED SANDSTONE TSA			
3500K 3500K		347V 347		CUSTOM COLOR CUS			
4000K 4000K		Contact factory for 347V		Contact factory for custom color - additional charges will apply			

PROJECT:	MECA CHI HEALTH CENTEF	TYPE:		CAT. #:	D1	-	SO	-	3500K	-	T22-48	-	277	-	DIM	-	TWH	-	SC	
----------	------------------------	-------	--	---------	----	---	----	---	-------	---	--------	---	-----	---	-----	---	-----	---	----	--

PERFORMANCE

	150 W	
OPTIC	DELIVERED LUMENS	LUMINAIRE EFFICACY
ASYMMETRIC		
	16,704 LM	108.0 LM/W

WIRING

FIXTURES PER CIRCUIT


*Based on 13AMP circuit

150 W	
120V	277V
10	24


PROJECT: MECA CHI HEALTH CENTER TYPE: CAT. #: D1 - SO - 3500K - T22-48 - 277 - DIM - TWH - SC

DIMENSIONS

SURFACE/WALL (SM)

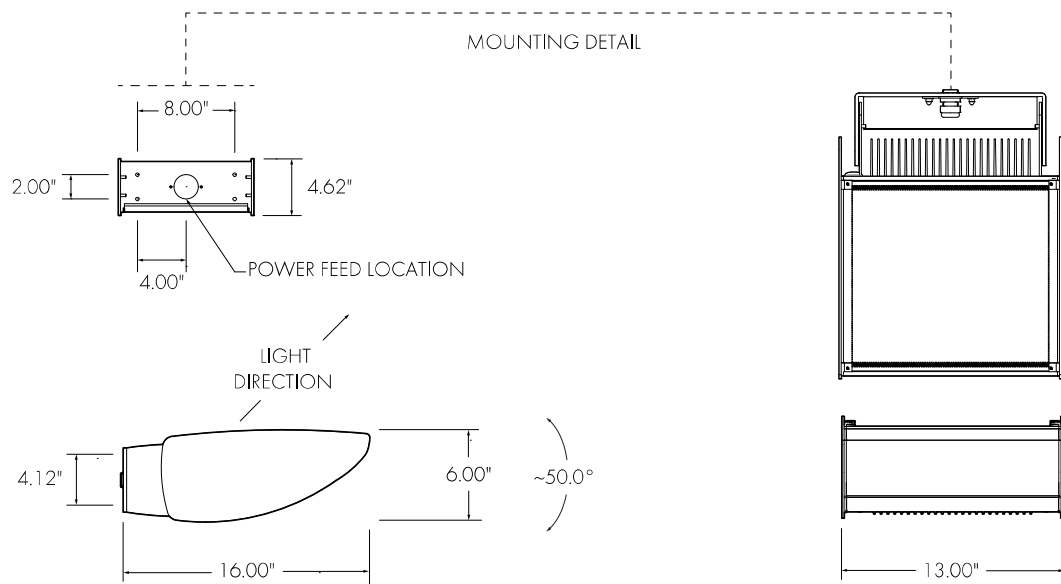

PENDANT SINGLE FIXTURE (PN)

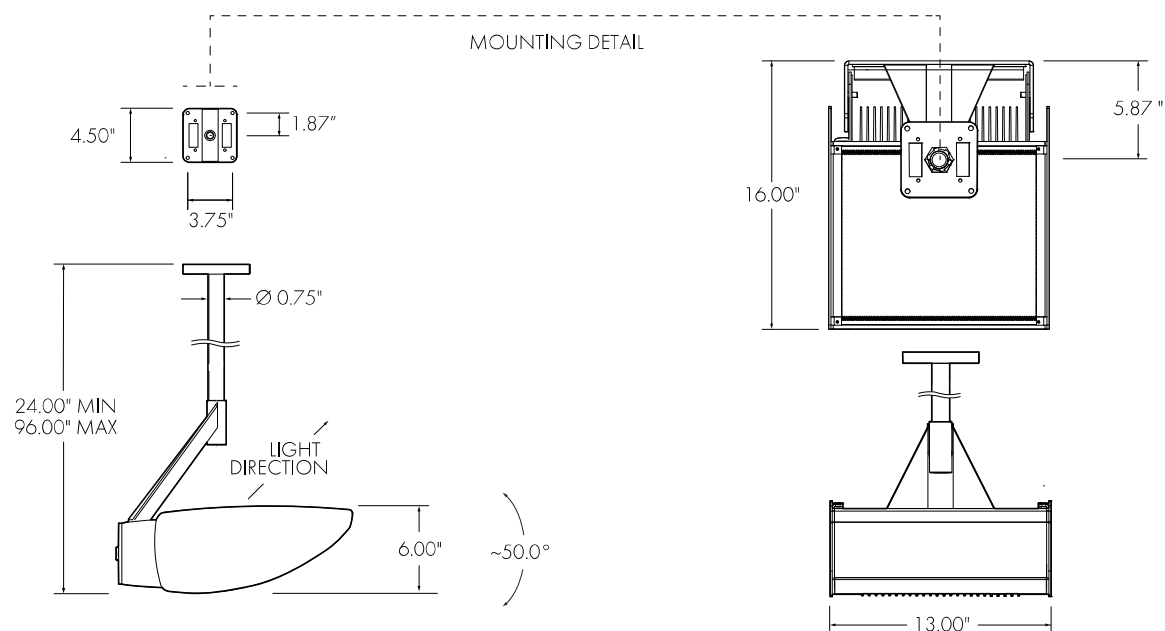

PROJECT:	MECA CHI HEALTH CENTEF	TYPE:		CAT. #:	D1 - SO - 3500K - T22-48 - 277 - DIM - TWH - SC
----------	------------------------	-------	--	---------	---

PENDANT TWIN FIXTURE (T22)

